


Sustainers with Puncture Crimping

Wicks Unlimited manufactures and supplies metal candle sustainers with the option of puncture crimping. This top-selling sustainer enables candle manufacturers to create tabbed wicks from waxed wick on reels that consume all the fuel (wax) at the candle's end of life. High-speed automated machinery creates a small piercing in the sustainer's wall to generate additional fuel (wax) flow, allowing the candle to consume all the fuel (wax) at the candle's end of life. Metal candle sustainers with puncture crimping are manufactured from the highest quality tin-coated steel. The thick tin coating inhibits corrosion often caused by the fragrance, dyes, and essential oils common in candles sold

Features:

- U.S.-based manufacturer & supplier of metal candle sustainers.
- Wicks Unlimited's best-selling metal sustainers with puncture crimping enable manufacturers to develop candles that consume all the fuel (wax) at the end of life.
- Precision machinery pierces the sustainer's wall to generate additional wax (fuel) flow, allowing the candle to consume all the wax (fuel) at the end of its life.
- Metal sustainers with puncture crimping are available with neck heights of 6.0 mm and include safety neck sustainers with neck heights of 10.0 mm, 13.0 mm, 13.2 mm, and 14.5 mm.
- Manufacturers can select base diameter(s) ranging from 14.5 mm to 20.00 mm.
- Wick insertion hole diameters range from 2.1 mm to 3.0 mm.
- Manufactured from the highest quality .010" (0.254 mm) thick tin-coated steel to inhibit corrosion caused by fragrance and essential oils.
- Wicks Unlimited's sustainers are accredited by the Quality Association for Candles and adhere to strict quality standards thanks to ISO: 9001:2015 certified quality management systems and state-of-the-art equipment.

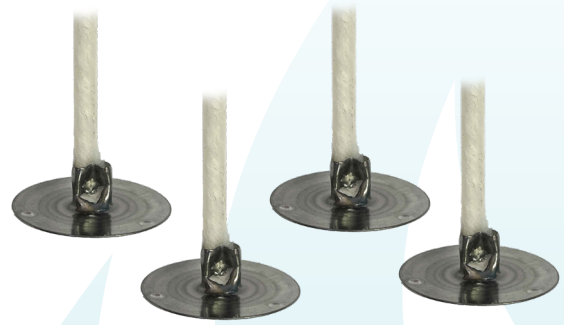

worldwide. Discover why candle manufacturers worldwide rely on Wicks Unlimited's diverse collection of wick products to meet their production requirements.

Non-Puncture Sustainer

| Sustainer | Base Diameter | Overall Height | Hole Diameter |
|-----------|---------------|----------------|---------------|
| A3792 | 15.0 mm .590" | 6.0 mm .236" | 2.4 mm .094" |
| A3779 | 15.0 mm .590" | 6.0 mm .236" | 3.0 mm .118" |
| A3957 | 20.0 mm .788" | 6.0 mm .236" | 2.1 mm .083" |
| A3797 | 20.0 mm .788" | 6.0 mm .236" | 2.4 mm .094" |
| A3796 | 20.0 mm .788" | 6.0 mm .236" | 3.0 mm .118" |
| A3881 | 20.0 mm .788" | 6.0 mm .236" | 4.1 mm .160" |
| A3798 | 15.0 mm .590" | 10.0 mm .394" | 2.4 mm .094" |
| A3777 | 15.0 mm .590" | 10.0 mm .394" | 3.0 mm .118" |
| A3961 | 20.0 mm .788" | 10.0 mm .394" | 2.1 mm .083" |
| A3800 | 20.0 mm .788" | 10.0 mm .394" | 2.4 mm .094" |
| A3799 | 20.0 mm .788" | 10.0 mm .394" | 3.0 mm .118" |
| A3850 | 15.0 mm .590" | 13.0 mm .510" | 3.0 mm .118" |
| A3851 | 15.0 mm .590" | 13.0 mm .510" | 2.4 mm .094" |
| A2149 | 15.0 mm .590" | 13.2 mm .520" | 2.4 mm .094" |
| A3874 | 14.5 mm .565" | 14.5 mm .571" | 3.0 mm .118" |



ISO 9001:2015 Certified • RAL Quality Mark Certified



Waxed Wick on Reels | Wick Clip Assemblies | Sustainers | Technical Services

1515 SW 13th Ct • Pompano Beach, Florida, 33069 • Phones (954) 946-3500 • (954) 545-7427

wicksunlimited.com

sales@wicksunlimited.com

[f](#) WicksUnlimited

[in](#) WicksUnlimited